
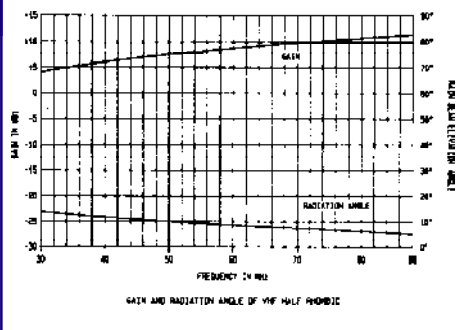
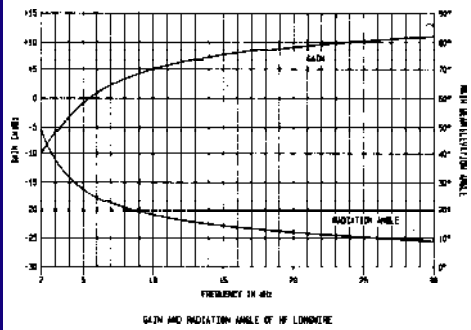
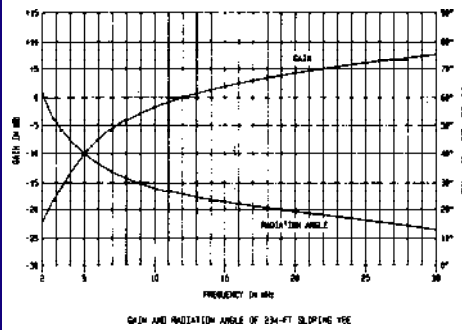
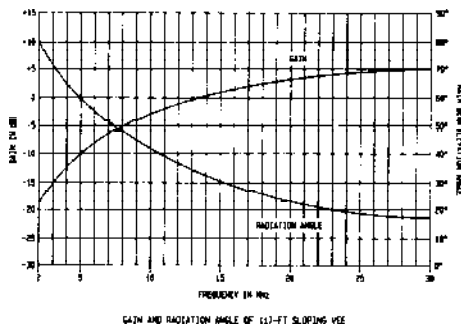


HVM-288

- MANPACK
- RAPID DEPLOYMENT
- HF-VHF
- DIRECTIONAL

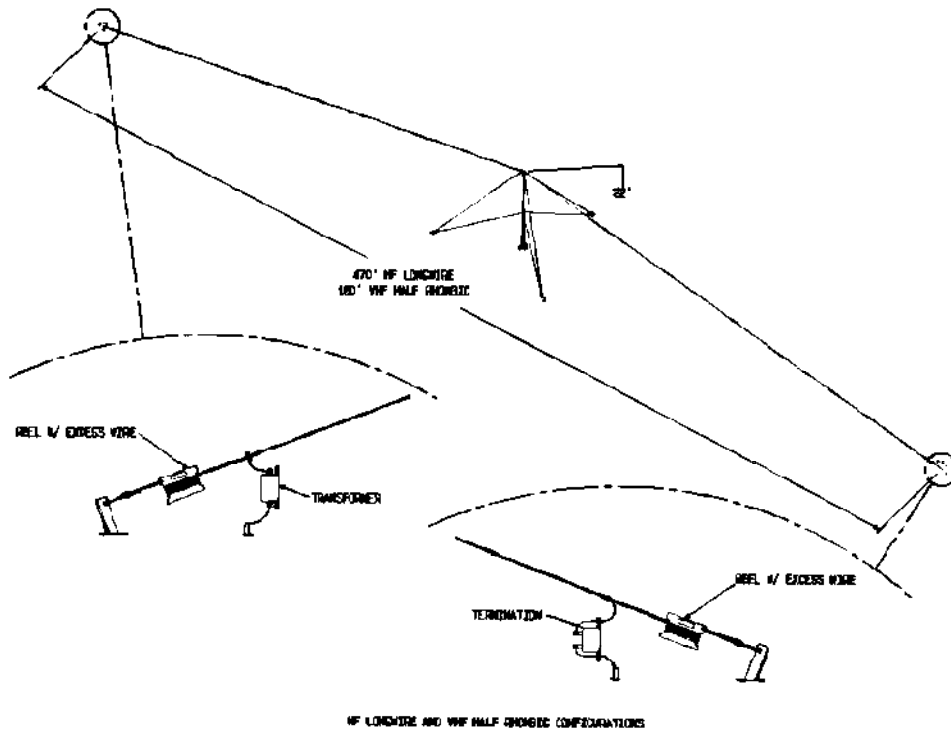

CONFIGURATION	SHORT HF SLOPING VEE	LONG HF SLOPING VEE	HF LONGWIRE	VHF HALF RHOMBIC
Frequency Range	2-30 MHz	2-30 MHz	2-30 MHz	30-88 MHz
Input Impedance (unbalanced)	50 Ohms	50 Ohms	50 Ohms	50 Ohms
Max VSWR	2:1	2:1	2:1	2:1
Polarization	Horizontal	Horizontal	Vertical	Vertical
Input Connector	BNC	BNC	BNC	BNC
Operating Temperature	-46°C to +50°C	-46°C to +50°C	-46°C to +50°C	-46°C to +50°C
Wind	50 mph	50 mph	50 mph	50 mph