


11 dBi CELLULAR OMNI-DIRECTIONAL ANTENNA

- Rugged, One-Piece Seamless Fiberglass Radome
- Three Color Choices or Will Custom Match
- 5 Year Guarantee

WIRELESS

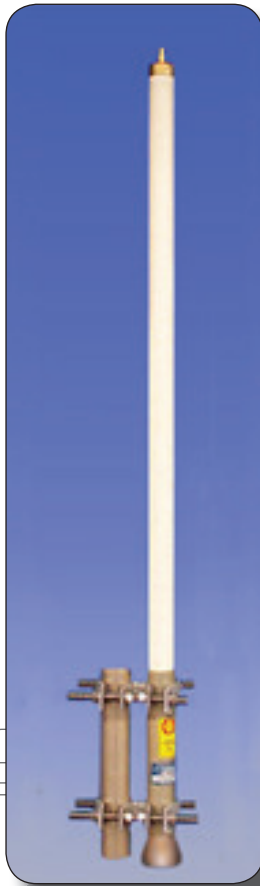

Model CEL360-806-11-T0

ELECTRICAL SPECIFICATIONS

| SPECS | PERFORMANCE |
|---|----------------------|
| Frequency Range | 806-894 MHz |
| VSWR, Typical / Maximum | 1.5/1.7 |
| Forward Gain (Over Half-Wave Dipole) | 11 dBi |
| Polarization | Vertical |
| Max Power Input | 500 Watts Continuous |
| Vertical Beamwidth (-3 dB Points) | 8° |
| Horizontal Beamwidth | Omi |
| Electrical Downtilt | 1-4° |

MECHANICAL & ENVIRONMENTAL SPECIFICATIONS

| SPECS | PERFORMANCE |
|----------------------------|---|
| Connector | 7/16 DIN or Type 'N' Female |
| Mounting | Galvanized Clamps, With Stainless Steel Nuts and Bolts |
| Dimensions and Weight | 120 Inches x 1.9 Inches O D / 22 lbs |
| Flat Plate Eq. | 0.95 Sq Ft |
| Color | White Standard (Color Options Available) |
| Lateral Thrust @ 100 MPH | 47 lbs |
| Torsional Moment @ 100 MPH | 143 ft lbs |
| Wind Survival | 155 MPH |
| Lightning Protection | Direct Ground |


**ANTENNA
PRODUCTS™**

Phazar™

101 S. E. 25th Avenue
Mineral Wells, TX 76067

800.553.1507 (USA ONLY)

p: 940.325.3301

f: 940.325.0716

e: sales@antennaproducts.com

www.antennaproducts.com

Pursuant to APC's policy of continuous product improvement, specifications are subject to change without notice or obligation.

Communication Solutions For A Wireless World™