


11 dBi OMNI WIRELESS LOCAL LOOP ANTENNA

- One-Piece Seamless Fiberglass Radome
- Dual (Tx-Rx) Models Available
- 0-8 Degrees Electrical Downtilt Available
- Three Color Choices or Will Custom Match
- 1 Year Guarantee

WIRELESS

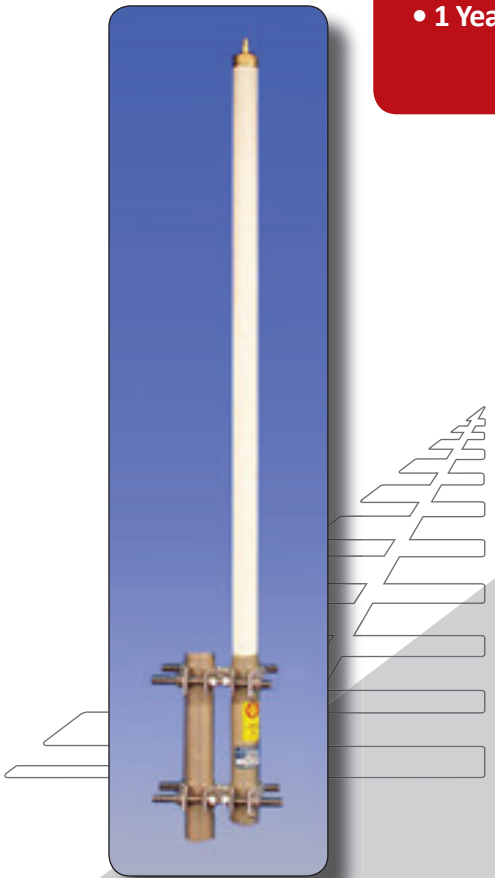

Model WLL360-2315-11-T0

ELECTRICAL SPECIFICATIONS

SPECS	PERFORMANCE
Frequency Range	2315-2350 MHz
VSWR	1.5:1 Max
Forward Gain (over half-wave dipole)	11.1 dBi
Polarization	Vertical
Max Power Input / Impedance	300 Watts Continuous with Type N Connector / 50 Ohms
Vertical Beamwidth (-3 dB Points)	7°
Horizontal Beamwidth (-3 dB Points)	Omni
Electrical Downtilt	0-8°

MECHANICAL & ENVIRONMENTAL SPECIFICATIONS

SPECS	PERFORMANCE
Termination	Type "N" Female
Mounting Clamps	Galvanized Clamps, (2 Sets) With Stainless Steel Nuts and Bolts
Antenna Dimensions, Inches	48 Inches Long x 1.75 Inches O D (1219.20 mm x 44.45 mm O D)
Flat Plate Equivalent	.66 Sq Ft
Weight	6 lbs (2.72 kg), Antenna Clamps
Lateral Thrust @ 100 MPH	26 lbs (11.79 kg)
Wind Survival	160 MPH (257.5 km)
Lightning Protection	Direct Ground ⚡



101 S. E. 25th Avenue
Mineral Wells, TX 76067

800.553.1507 (USA ONLY)

p: 940.325.3301

f: 940.325.0716

e: sales@antennaproducts.com

www.antennaproducts.com

Pursuant to APC's policy of continuous product improvement, specifications are subject to change without notice or obligation.

Communication Solutions For A Wireless World™

