


DUAL BAND OMNI-DIRECTIONAL ANTENNA

- Rugged, Pultruded Fiberglass Radome
- Frequency Coverage for Entire 700, 850 and AWS Bands

WIRELESS

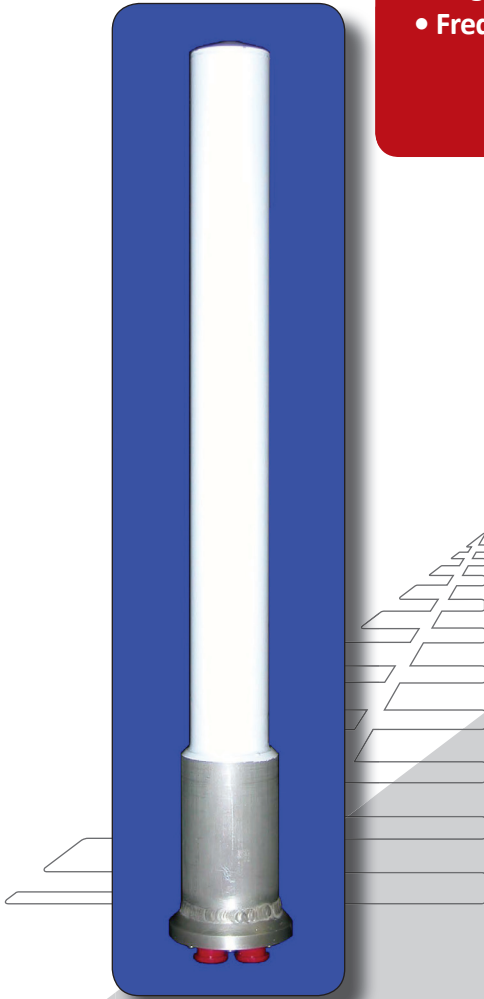

Model BRSAWS360D-698/1710-2-T0-N


ELECTRICAL SPECIFICATIONS

SPECS	PERFORMANCE
Frequency Range	698-940;1710-2155 MHz
VSWR, Typical / Maximum	1/1.5
Forward Gain	2 dBi for Each Frequency Band
Polarization	Vertical
Isolation	>20 dB
Max Power Input	200 Watts
Vertical -3dB Beamwidth	75° +/- 1° (Nominal)
Horizontal -3dB Beamwidth	360° +/- 5°
Azimuth Ripple	+/- .5 dB

MECHANICAL & ENVIRONMENTAL SPECIFICATIONS

SPECS	PERFORMANCE
Connector	Type 'N' Male X 2
Mounting	Side Mount
Dimensions and Weight	22 inches x 2.0 inches O.D. / <10 lbs
Color	White
Wind Survival	120 MPH
Lightning Protection	Direct Ground

ELEVATION PATTERN FOR EACH ANTENNA

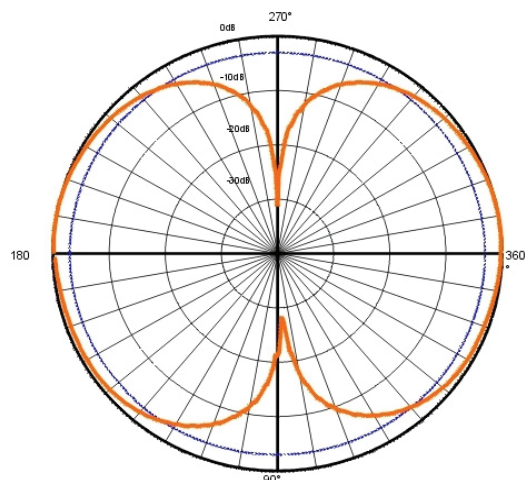

**ANTENNA
PRODUCTS™**
Phazar™

101 S. E. 25th Avenue
Mineral Wells, TX 76067

800.553.1507 (USA ONLY)

p: 940.325.3301

f: 940.325.0716

e: sales@antennaproducts.com

www.antennaproducts.com

Pursuant to APC's policy of continuous product improvement, specifications are subject to change without notice or obligation.

Communication Solutions For A Wireless World™