

## 25 DEGREE PANEL ANTENNA

- UV Stabilized ABS Radome
- Wall/Panel-Back Mounted
- Small Package Designed for Outdoor Use

**WIRELESS**

### Model ISM25-2400-12-T0-N-SV6

Part Number: 1009-0466-404



ELECTRICAL SPECIFICATIONS	
SPECS	PERFORMANCE
Frequency Range	2400-2485 MHz
VSWR	1.6:1 Max (50 Ω)
Gain	12 dBi
Polarization	Linear
Elevation -3 dB Beamwidth	70°
Azimuth -3 dB Beamwidth	25°
Power Input	200 Watts

MECHANICAL & ENVIRONMENTAL SPECIFICATIONS	
SPECS	PERFORMANCE
Connector	Type "N" Female
Mounting	M6 Mounting Hardware
Dimensions (L x W x H)	8.55 Inches x 4.46 Inches x 2.19 Inches (217.17 mm x 113.28 mm x 55.63 mm)
Color	Grey, 26270 (PER FED-STD-595)
Weight	<2 lbs (<0.91 kg)
Lightning Protection	Direct Ground

  
**ANTENNA  
PRODUCTS™**  
**Phazar™**

101 S. E. 25th Avenue  
Mineral Wells, TX 76067

800.553.1507 (USA ONLY)  
p: 940.325.3301  
f: 940.325.0716

e:sales@antennaproducts.com

[www.antennaproducts.com](http://www.antennaproducts.com)

**PATTERN(S)**

**SEE PAGE 2**

Pursuant to APC's policy of continuous product improvement, specifications are subject to change without notice or obligation.

*Communication Solutions For A Wireless World*

# 25 DEGREE PANEL ANTENNA

- UV Stabilized ABS Radome
- Wall/Panel-Back Mounted
- Small Package Designed for Outdoor Use


## WIRELESS




# Model ISM25-2400-12-T0-N-SV6

Part Number: 1009-0466-404

## Azimuth/Elevation Patterns

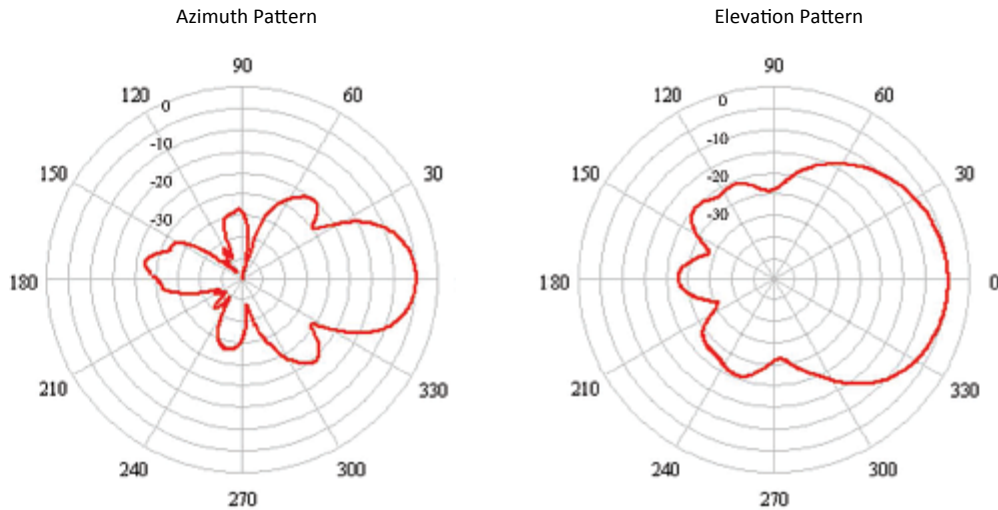

## Mounting Views

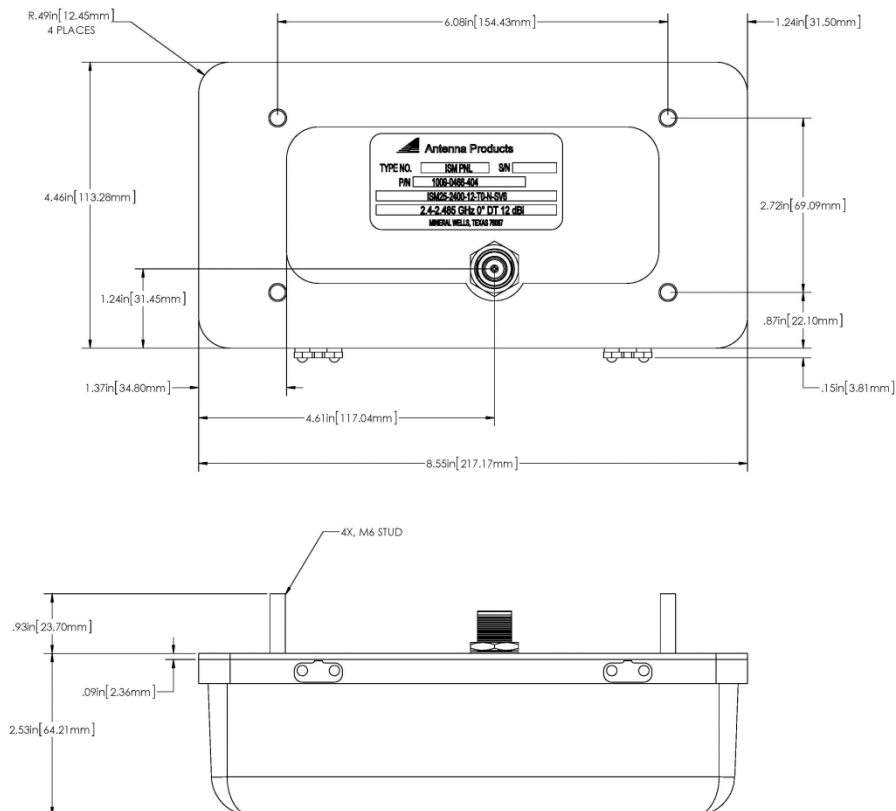

e: sales@antennaproducts.com | O | S. E. 25th Avenue 800.553.1507 (USA ONLY)  
www.antennaproducts.com | Mineral Wells, TX 76067 | p: 940.325.3301 | f: 940.325.0716

Pursuant to APC's policy of continuous product improvement, specifications are subject to change without notice or obligation.