


**11 dBi 900
MHz
Omni-
Directional
Paging
Antenna**

PHAZAR™
WIRELESS ANTENNAS

- One-Piece Seamless Radome
- Three color choices or custom match
- ISM360-920-11-T0
- 5 Year Guarantee

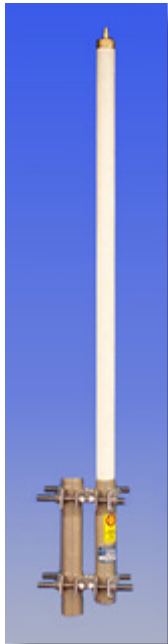

ELECTRICAL SPECIFICATIONS

SPECS	PERFORMANCE
Frequency range	902-928 MHz
VSWR	<1.3:1 (Typ)
Forward Gain (over half-wave dipole)	11 dBi
Polarization	Vertical
Max Power Input	600 Watts Continuous With Type N Connector
Vertical Beamwidth (-3 dB Points)	8 Degrees

MECHANICAL SPECIFICATIONS

SPECS	PERFORMANCE
Termination	Type N Female or 7/16 DIN
Mounting Clamps	Stainless Steel Nuts and Bolts
Flat Plate Eq.	1.25 Sq Ft
Weight	15 lbs, Clamp 6 lbs
Wind Load @ 100 MPH	62 lbs
Length x Diameter, Inches	10.5 Feet Long x 2 3/8 Inch OD

ENVIRONMENTAL SPECIFICATIONS

Lightning Protection	Direct Ground
Bending Moment At 100 MPH Wind, 1 Inch Below Top Of Support Pipe	245 Ft. Lbs.