


**11 dBd  
Omni  
PCS  
Antenna**

**PHAZAR™**  
WIRELESS ANTENNAS

- One-Piece Seamless Fiberglass Radome
- Three Color Choices or Will Custom Match
- 5 Year Guarantee
- Model PCS360-1850-11-T0
- 0-8 Degrees Electrical Downtilt Available

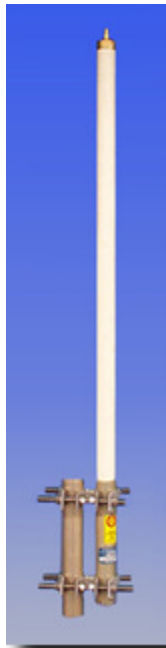

**ELECTRICAL SPECIFICATIONS**

SPECS	PERFORMANCE
Frequency Range	1850-1990 MHz
VSWR	<1.5:1 (Typ)
Forward Gain (over half-wave dipole)	11 dBi
Polarization	Vertical
Max Power Input	300 Watts Continuous with Type N Connector
Vertical Beamwidth (-3 dB Points)	7 Degrees
Horizontal Beamwidth (-3 dB Points)	Omni
Electrical Downtilt	0-8 Degrees

**MECHANICAL SPECIFICATIONS**

SPECS	PERFORMANCE
Termination	7/16 DIN
Mounting Clamps	Galvanized Clamps and Stainless Steel Hardware / 2 sets
Weight	6 lbs
Wind Load @ 100 MPH	26 lbs
Antenna Dimensions, Inches	65 Long x 1.75 Inch OD
Flat Plate Equivalent	.43 Sq Ft

**ENVIRONMENTAL SPECIFICATIONS**

Wind Survival	160 MPH
Lightning Protection	Direct Ground