


**Extra
Heavy
Duty 5 dBi
Gain Omni
Broadband
VHF
Antenna**

PHAZAR™
WIRELESS ANTENNAS

- One-Piece Seamless Radome
- Three color choices or will custom match
- 5 Year Guarantee
- VHF360-144-5-T0 (144-148 MHz)
- VHF360-150-5-T0 (150-160 MHz)
- VHF360-160-5-T0 (160-170 MHz)
- VHF360-170-5-T0 (170-175 MHz)
- VHF360-216-5-T0 (216-226 MHz)

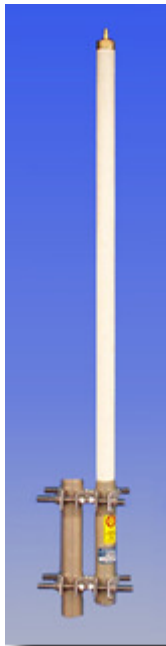

ELECTRICAL SPECIFICATIONS

SPECS	PERFORMANCE
Bandwidth	4-10 MHz
Frequency Range	144-226 MHz
VSWR	1.5:1 (Typ)
Forward Gain (over half-wave dipole)	5 dBi
Polarization	Vertical
Max Power Input	500 Watts Continuous with Type N Connector
Vertical Beamwidth (-3 dB Points)	36 Degrees
Horizontal Beamwidth (-3 dB Points)	Omni
Electrical Downtilt	0-6 Degrees

MECHANICAL SPECIFICATIONS

SPECS	PERFORMANCE
Termination	Type N Female or 7/16 DIN Connector
Mounting Clamps (2 sets)	Galvanized Clamps and Stainless Steel Hardware
Weight	25 lbs
Wind Load @ 100 MPH	56 lbs
Antenna Dimensions, Inches	140 Long x 2.375 Inch OD

ENVIRONMENTAL SPECIFICATIONS

Wind Survival	150 MPH
Lightning Protection	Direct Ground